


IES SALES & SERVICES LLC

2340 NW 147TH ST. BAY F3, OPALOCKA, FL 33054

OFFICE: 1-(305)-687-9400
FAX: 1-(305)-687-9700
RECYCLEIES@GMAIL.COM
WWW.REFUSEWASTEQUIP.COM

I-PAK SELF CONTAINED COMPACTORS

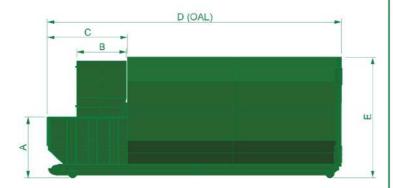

I-PAK						
Cap. C	A	В	С	D	Е	Poblot.
15	4'3-1/2"	3'6"	5′7″	14'8"	8'8"	9,000lbs.
20	4'3-1/2"	3'6"	5'7"	17′ 1″	8'8"	9,700lbs.
25	4'3-1/2"	3'6"	5'7"	19'7"	8'8"	10,200lbs.
30	4'3-1/2"	3'6"	5′7″	22'	8'8"	10,600lbs.
34	4'3-1/2"	3'6"	5′7″	22'11"	8'8"	11,100lbs.

32"

The specification sizes/measurements in this document are not complete or definitive and are subject to change with out notice, all drawings and information contained herein is intellectual and exclusive properties of IES Sales and Services LLC.

Specifications

Charge Box Capacity

[Mfrs. Rating] - 1.9 cu. yd.

Clear Top Opening - 40"L x 57-1/2"

Performance Characteristics

Cycle Time - 33 s

Total Normal Force - 39,900 lbs.

Total Maximum Force - 49,000 lbs.

Normal Ram Face Pressure - 22.9 psi

Maximum Ram Face Pressure - 23 psi

Ram Penetration - 6"

Electrical Equipment

Electric Motor 3/60/230-460 - 10 hp

Electric Control Voltage - 120 VAC

Panel Box Assembly - UL/ETL rated - Key Operated

All Circuits Fused - 3 Push Button Station

Start/Stop/Reverse

Hydraulic Equiptment

Hydraulic Pump - 10 gpm

Normal Pressure - 1850 psi

Maximum Pressure - 2300 psi

Hydraulic Cylinders (2) - Bore - 4"

- Rod - 2 - 1/2"

Features:

- -Easy loading from either ground or dock level
- -Excellent crushing force to reduce refuse to a fraction of its former size.
- -Easy and fast installation.
- -Continuous feeding capablity; even while in use.
- -Adaptable to special loading systems such as large. capacity hoppers, security chutes or total enclosures.
- -Fire hose connection with each unit.
- -Factory tested to assure leakproof design.
- -UL / ETL Listed
- IES 2 year Warranty (Structure)
 - 1 year (Components)
 - 6 Months (Labor)

